



**ONDULINE EASYFIX®**

**PATIO**



**GARDEN SHED**

Made by me!




8306105A - 12/2018 - Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.



**ONDULINE EASYFIX®**

Made by me!




Before



After

**INTUITIVE COVERING SHEET: EASY & FUN TO FIX.**

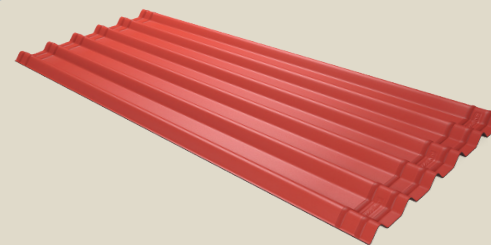

**ONDULINE EASYFIX®**



**GARDEN SHED**



**GARAGE**



Easy to install



Onduline® Sealsmart™



Watertight



Lightweight



Intuitive installation



Eco-responsible

More than 50% of our material made with recycled content



Made in Europe



Norm EN 534



Recycled Content Verified by ICC-ES

See ICC-ES ESR-1016



Protection above all

Sustainable product & production because we care about environment!

Fully compliant with regulations

ONDULINE BUILDING PRODUCTS LTD  
Dawson House | 5 Jewry Street  
London | EC3N 2EX  
[onduline.co.uk](http://onduline.co.uk)



Onduline French joint stock company  
share capital of €11,323,485.05  
RCS Nanterre 552 088 361

**Onduline®**  
Lightweight roofing systems

**Onduline®**  
Lightweight roofing systems


Made by me!

**ONDULINE EASYFIX®**

The new and innovative sheets ONDULINE EASYFIX® represent the ideal solution for all people who want a roofing material really easy to install and aesthetically pleasant.




## A large choice of colors

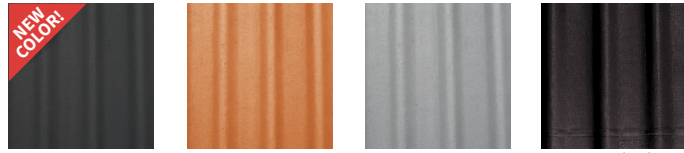


## Technical characteristics

Length	200 cm
Width	82 cm
Corrugation height	38 mm
Weight per m <sup>2</sup>	2,77 kg
Weight per sheet	4,5 kg
Surface	1,64 m <sup>2</sup>
Net coverage surface	1,34 m <sup>2</sup>

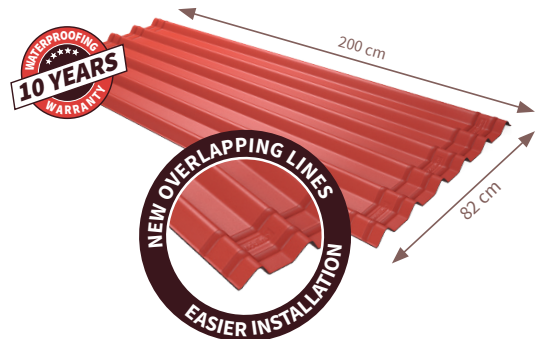


Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on [onduline.com](http://onduline.com)).


## Installation in few and easy steps

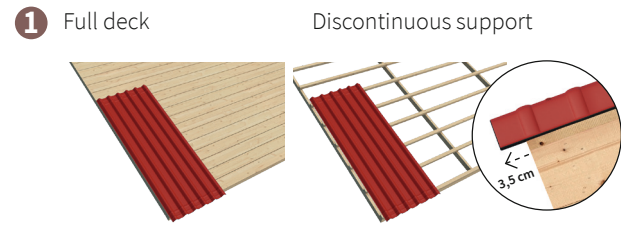

Start laying sheets over the gutter with 3,5 cm overhang maximum. Installation could be realized either on full deck (recommended) or on discontinuous support (**every 37 cm**).

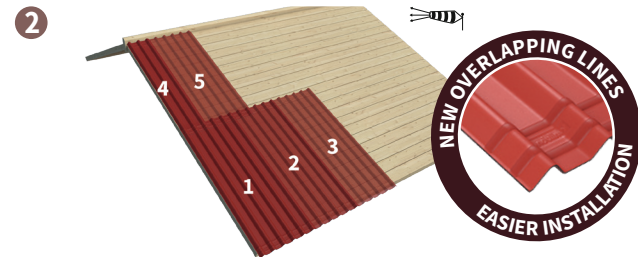


Lay sheets in the opposite direction to the prevailing winds. Stagger the rows, by starting the second row with a half sheet. Ensure easily the waterproofing by aligning the two overlapping lines.

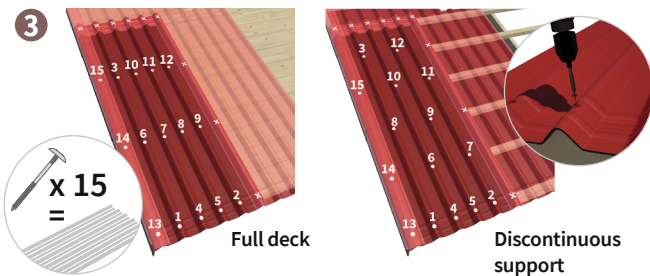


15 fixings minimum should be used per sheet. The fixing, always set in the top of corrugations, should be done in the right order and in between the two overlapping lines. Wait to fix the last corrugation until you overlap it with the verge element or the next sheet.


**Maintain regularly your roof for a better durability: remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.**

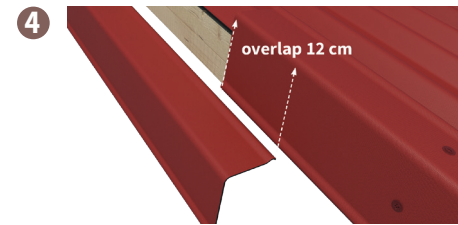

The aesthetics and wind uplift protection can be optimized by using the verge element accessory, which is fixed first on the sidewall, then as well on the top of the corrugation.

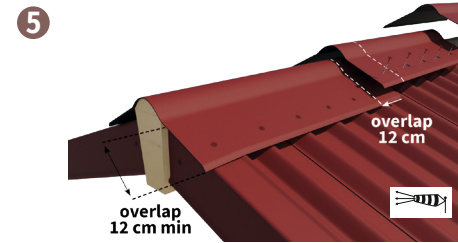


Cover the ridge with the standard ridge and fix it on each side of the roof, on top of each corrugation. The direction of the overlap is opposite to the direction of the prevailing winds.

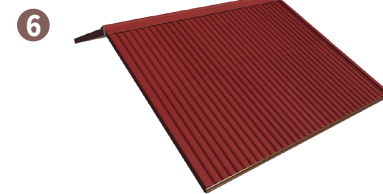

ONDULINE EASYFIX® sheets provide an attractive, colored and long lasting finishing to a wide variety of garden buildings.

### CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$




Minimum pitch required: 9%



Watch the video!

## Accessories

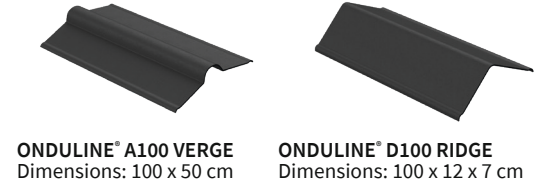

Minimum 10 fasteners/m<sup>2</sup>



Made by me!

### How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.



Think Safety wear PPE