

Material

Highly vapour-permeable, three-layer roof membrane made of a layer of microporous functional film protected on both sides with a polypropylene vlies. The film layer provides resistance to water penetration and regulates the water vapour flow through the roof system.

Application


- On roofs with full or part-boarding
- Initial underlay for thermally insulated, ventilated, sloping roofs
- For most types of roof coverage, and in particular for concrete tiles and sheet tiles
- As wind insulation in the siding method.

Features & benefits


- Improves the efficiency of thermal insulation
- Reduces energy consumption
- Regulates the flow of water vapour
- Reduces CO2 emissions to the atmosphere
- Resistant to high and low temperatures
- Resistant to mechanical damages.

Technical characteristics

Material	Polypropylene
Composition	3
Weight	95 g/m ² (±10 %)
Width	1,5 m
Length	50 m
Reaction to fire	Class E
Resistance to water penetration	Class W1
Water vapor resistance (Sd)	0,02 m (-0,01/+0,03)
Tensile strenght along MD	200 N/50 mm (±30%)
Tensile strenght across CD	110 N/50 mm (±30%)
Elongation along MD	80 % (±30%)
Elongation across CD	45 % (±30%)
Tear resistance along MD	90 N (±20%)
Tear resistance across CD	125 N (±20%)
Flexibility at low temperature	- 40 °C
Alignment	Requirements met
Stability of dimensions	< 2%
Resistance to UV	3 months
Temperature resistance	- 40 °C to +80 °C
Meet the requirements	EN 13859-1:2010, EN 13859-2:2010

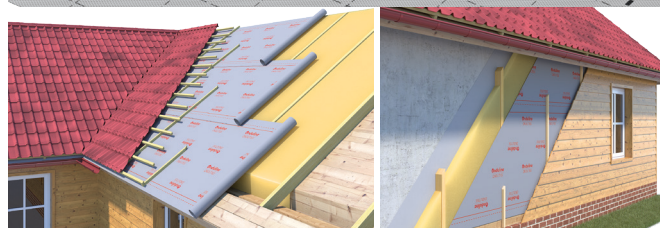

Color



Light Grey

Packaging

Roll 1,5 x 20 m - 105 rolls per pallet

Roll 1,5 x 50 m - 52 rolls per pallet

Storage

Store rolls horizontally on the pallet or standing on the end after being opened, in a dry, protected from direct sunlight area. Protect material from direct sunlight and inclement weather until ready for use. Keep away from chemical substances, in particular those based on solvents.

Application and warranty

All the claims will be considered with respect to application recommendations issued by Onduline company.

Installation

Special conditions of installation are required. Refer to the installation guide.

This TDS was made based on currently available information. Product was made in accordance with above mentioned parameters but producer/distributor can't anticipate any future change as well as change of regulations. It is the consumer's responsibility to use the product in accordance to producer/ distributor recommendations and his needs. All the claims will be considered with respect to application recommendations issued by Onduline company.

onduline.com

Onduline
24, Quai Gallieni
92150 Suresnes, FRANCE